


ISUZU 4JB1

INDUSTRIAL DIESEL

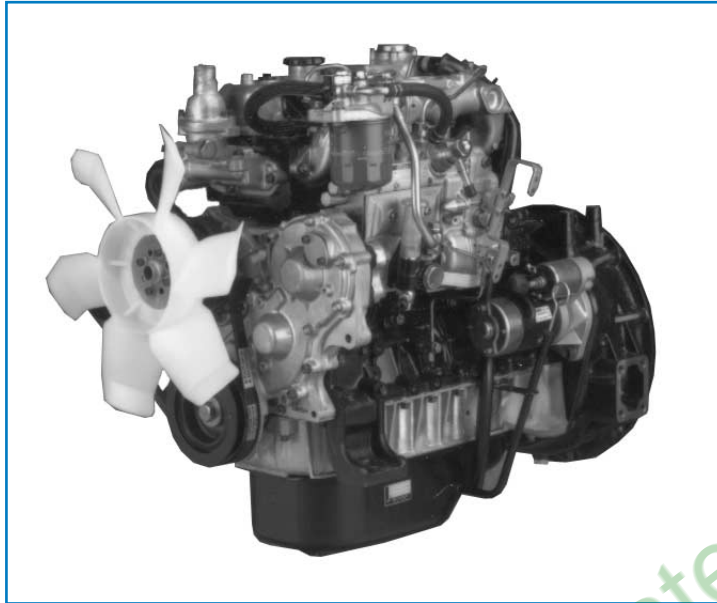

MAIN SPECIFICATIONS

Type	4 Cylinder, 4 Cycle, Water Cooled, OHV, Vertical In-Line, Direct Injection
Bore & Stroke	3.7 x 4.0 in. (93mm x 102mm)
Piston Displacement	169 cu. in. (2.8 l)
Compression Ratio	18.2:1
Dry Weight	552 lbs. (250 kg)
Dimensions (L x W x H)	31.9 x 23.6 x 28.0 in. (809 x 600 x 711 mm)
Coolant Capacity	5.3 qt. (5.0 l)
Lube Oil Capacity	7.9 qt. (7.5 l)
Engine Rotation Direction	Counter Clockwise from Flywheel


MAIN FEATURES (Standard)

Alternator	12V - 35A
Voltage Regulator	Internal
Starter	12V - 2.2 kW
Exhaust Outlet	Rear Upward
Air Inlet	Center Upward
Flywheel Housing	SAE #4 Type (w/metric threads)
Flywheel	SAE Type for 10" over center clutch (w/metric threads)
Oil Pan	30° Inclination all directions
Water Outlet	Upward
Fan	15.7 in. (400 mm) Suction

INDUSTRIAL RATING*

Intermittent	70 BHP @ 3000 RPM
Continuous	61 BHP @ 3000 RPM
Max Torque	132 lb. ft. @ 2000 RPM

*SAE J1995 Gross BHP
Specifications subject to change without notice.

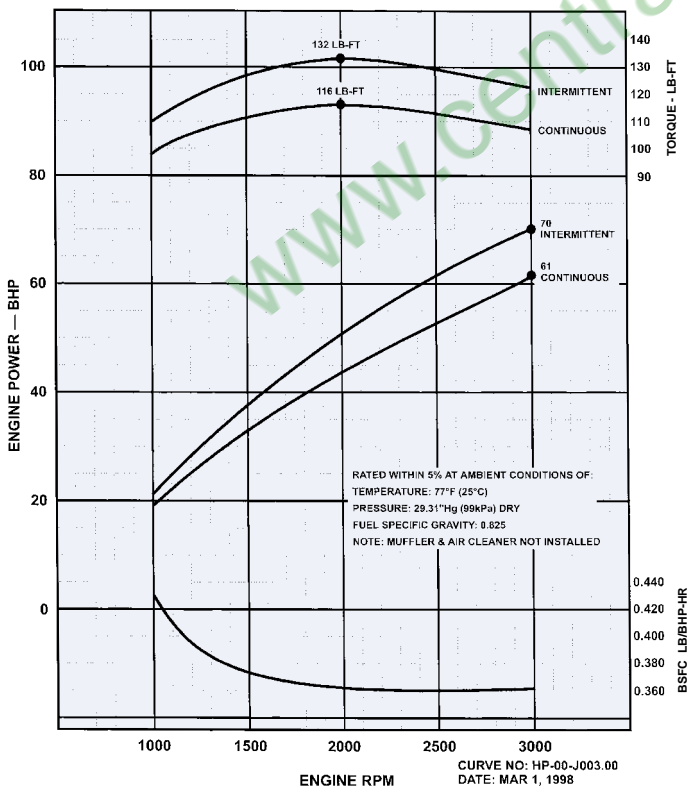

AMERICAN ISUZU MOTORS INC.

PowerTrain Division



ISUZU
DIESEL

46401 COMMERCE CENTER DRIVE • PLYMOUTH, MI 48170
PHONE: (734) 582-9470 • FAX: (734) 455-7581
www.isuzuengines.com

ISUZU 4JB1

INDUSTRIAL DIESEL

DIMENSIONS

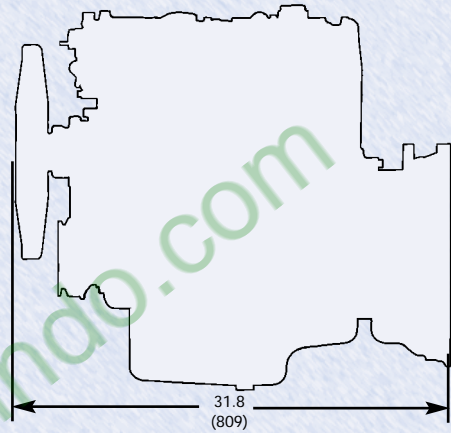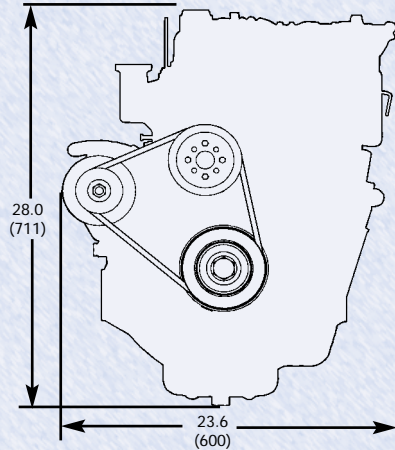

ISUZU "J" SERIES SPECIAL FEATURES

QOS-III Glow Plug for Fast Start
Low Emissions (Tier 1 Certified)
Quiet Operation

LOW EMISSIONS

Direct Injection

QUIET OPERATION

Offset Piston Pins for Noise Reduction
Auto-thermatic Pistons

ADDITIONAL FEATURES

Replaceable Cromard Dry Liners
Rigid Cylinder Block
Low Fuel Consumption
Compact Size and Light Weight

ISUZU
DIESEL

AMERICAN ISUZU MOTORS INC.

PowerTrain Division

46401 COMMERCE CENTER DRIVE • PLYMOUTH, MI 48170
PHONE: (734) 582-9470 • FAX: (734) 455-7581
www.isuzuengines.com